# **OSRAM** PLT3 450GB **Datasheet**

Preliminary datasheet version





#### Metal Can TO38

# **PLT3 450GB**

Blue Laser Diode in TO38 ICut Package













#### **Applications**

- Appliances & Tools
- Entertainment
- Functional Illumination
- Medical Imaging

- Outdoor & Industrial Lighting
- Projection
- Visualization

#### **Features**

- Typical emission wavelength: 450 nm
- Efficient radiation source for cw and pulsed operation
- Single mode semiconductor laser
- High modulation bandwidth
- Miniaturized TO38 ICut package
- Laser diode isolated against package



OI			
Ora	erinc	i intoi	rmation

Type Peak output power Ordering Code

typ. P<sub>opt</sub>

PLT3 450GB 100 mW Q65113A4975



Maximum Ratings			
Parameter	Symbol		Values
Operating temperature	T <sub>op</sub>	min. max.	-20 °C 70 °C
Storage temperature	$T_{stg}$	min. max.	-40 °C 85 °C
Peak output power 1)  T <sub>case</sub> = 25 °C	$P_{opt}$	max.	110 mW
Reverse voltage <sup>2)</sup> T <sub>case</sub> = 25 °C	$V_R$	max.	2 V
Soldering temperature t <sub>max</sub> = 10 sec	T <sub>s</sub>	max.	260 °C

Operation outside these conditions may damage the device. Operation at maximum ratings may influence lifetime.

# Preliminary datasheet version


#### **Characteristics**

 $P_{opt}$  = 100 mW;  $T_c$  = 25 °C

Parameter	Symbol		Values
Operating current	l <sub>op</sub>	typ.	87 mA
	- P	max.	120 mA
Peak wavelength 3)	$\lambda_{peak}$	min.	440 nm
	poun	typ.	450 nm
		max.	460 nm
Spectral bandwidth (FWHM)	Δλ	typ.	1 nm
Beam divergence (FWHM) parallel to pn-junction	Θμ	min.	5 °
	"	typ.	8.4 °
		max.	10 °
Beam divergence (FWHM) perpendicular to pn-junction	$\Theta_{\!\scriptscriptstyle \perp}$	min.	18 °
		typ.	21.5 °
		max.	25 °
Threshold current	l <sub>th</sub>	typ.	12 mA
	ui	max.	30 mA
Forward voltage 4)	V <sub>F</sub>	typ.	5.2 V
		max.	6.5 V
TE polarization	P <sub>TE</sub>	typ.	100:1
Modulation frequency	f	min.	100 MHz


# Relative Spectral Emission 5), 6)

 $P_{opt} = f(\lambda)$ 




# Beam Divergence 6)

 $P_{opt} = f(\Theta)$ 




# Optical Output Power 5), 6)

$$P_{opt} = f(I_F)$$

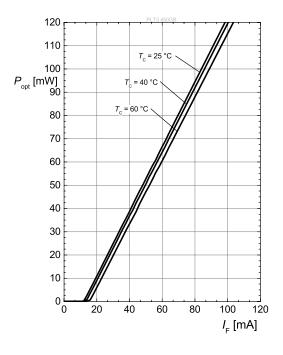


# Operating Voltage 5), 6)

$$V_F = f(I_F)$$

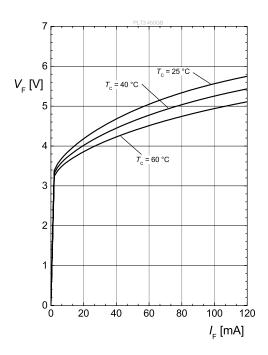


#### **Threshold Current**

$$I_{th} = f(T_c)$$

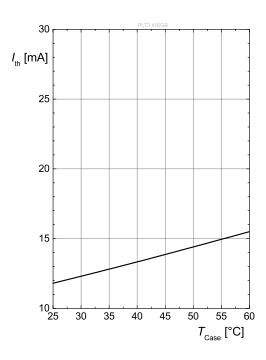

# **Dimensional Drawing** 7)

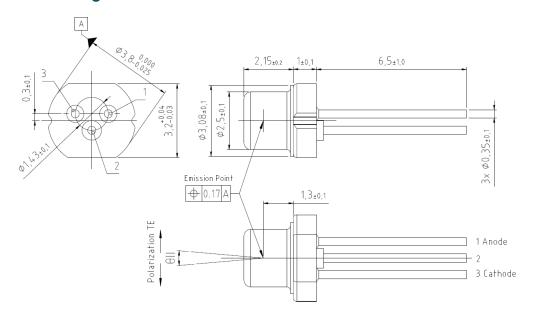

C63062-A4180-A1-03


#### **Further Information:**

**Approximate Weight:** 141.0 mg

ESD advice: ATTENTION - Observe Precautions For Handling - Electrostatic Sensitive

Device.


# **Electrical Internal Circuit**

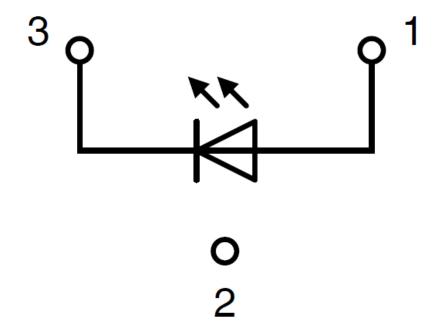

Pin	Description	
PIN 1	LD Anode	
PIN 2	Case	
PIN 3	LD Cathode	


Preliminary datasheet version

Tray 7) 200 pieces per tray

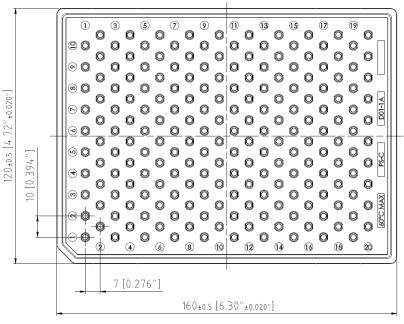


C63062-A4336-B1

# Barcode-Product-Label (BPL)

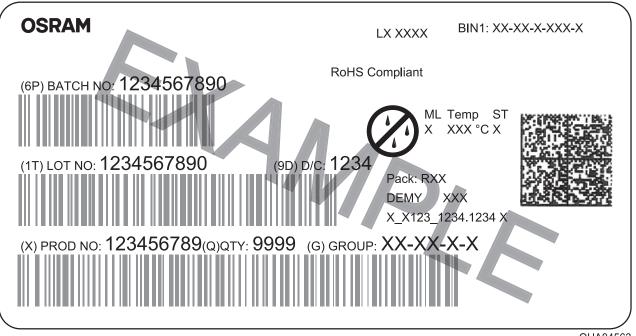

OHA04563

#### Schematic Transportation Box 7)

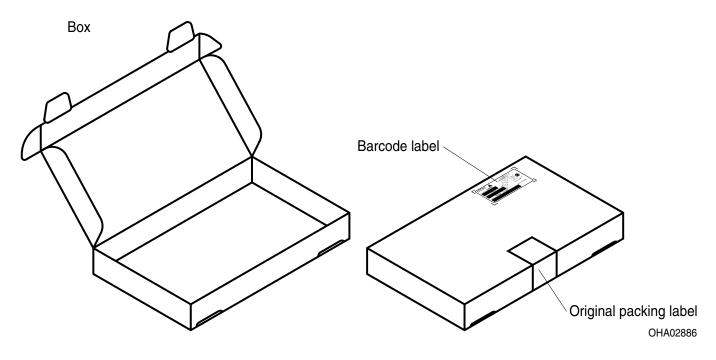

#### **Dimensions of Transportation Box**

Width	Length	Height
215 ± 5 mm	265 ± 5 mm	95 ± 5 mm

#### **Notes**

Depending on the mode of operation, these devices emit highly concentrated visible and non visible light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.



#### **Notes**

#### Important notes of operation for laser diode

#### a) Electrical operation

OSRAMs laser diodes are designed for maximum performance and reliability. Operating the laser diode above the maximum rating even for very short periods of time can damage the laser diode or reduce its lifetime. The laser diode must be operated with a suitable power supply with minimized electrical noise. The laser diode is very sensitive to electrostatic discharge (ESD). Proper precautions must be taken.

#### b) Mounting instructions

In order to maintain the lifetime of the laser diode proper heat management is essential. Due to the design of the laser diode heat is dissipated only through the base plate of the diode's body. A proper heat conducting interconnection between the diodes base plate and the heat sink must be maintained.

For further application related information please visit https://ams-osram.com/support/application-notes



#### Disclaimer

AMS OSRAM assumes no liability whatsoever for any use of this document or its content by recipient including, but not limited to, for any design in activities based on this preliminary draft version. AMS OSRAM may e.g. decide at its sole discretion to stop developing and/or finalizing the underlying design at any time.

#### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

#### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

#### Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer - or customer supplied by buyer - considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.



#### **Glossary**

- 1) **Brightness:** The brightness values are measured with a tolerance of ±11%.
- 2) Reverse Operation: This product is intended to be operated applying a forward current within the specified range. Applying any reverse bias shall be avoided.
- 3) Wavelength: λpeak is measured with an internal reproducibility of ±0.3 nm (acc. to GUM with a coverage factor of k = 3).
- 4) Forward Voltage: The forward voltages are measured with a tolerance of ±0.1 V.
- 5) Typical Values: Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 6) **Testing temperature:** TA = 25°C (unless otherwise specified)
- Tolerance of Measure: Unless otherwise noted in drawing, tolerances are specified with ±0.1 and dimensions are specified in mm.



#### **Revision History**

Version	Date	Change
0.0	2022-12-22	Initial Version
0.1	2023-06-21	Electro - Optical Characteristics (Diagrams) Type Designation System

#### Preliminary datasheet version



EU RoHS and China RoHS compliant product 此产品符合欧盟 RoHS 指令的要求; 按照中国的相关法规和标准, 不含有毒有害物质或元素。

#### Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria Phone +43 3136 500-0 ams-osram.com © All rights reserved



